## (19) World Intellectual Property Organization

International Bureau



## 

(43) International Publication Date 7 April 2005 (07.04.2005)

## (10) International Publication Number WO 2005/032221 A3

(51) International Patent Classification7: 13/04

H05K 13/02,

(21) International Application Number:

PCT/EP2004/052116

(22) International Filing Date:

9 September 2004 (09.09.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 103 44 409.2

25 September 2003 (25.09.2003)


- (71) Applicant (for all designated States except US): MAR-CONI COMMUNICATIONS GMBH [DE/DE]; Gerberstrasse 33, 71520 Backnang (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KONRATH, Willibald [DE/DE]; Eichendorffweg 17, 71544 Weissach

im Tal (DE). SCHMELCHER, Haiko [DE/DE]; Linden str. 36, 74427 Fichtenberg (DE).

- (74) Agents: COCKAYNE, Gillian et al.; Marconi Intellectual Property, Crompton Close, Basildon Essex SS14 3BA
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING A HIGH-FREQUENCY ASSEMBLY

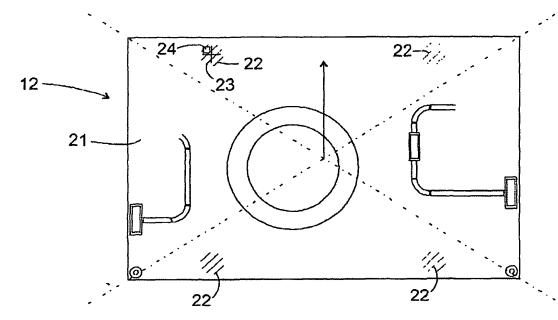

(57) Abstract: In the manufacture of a high-frequency assembly, a plurality of components, at least one (12) of which is frequencyspecific, are placed with respect to each other using a placing apparatus and are interconnected. In a specimen of the frequencyspecific component (12, 30) a feature (23, 24) which encodes the frequency is looked for. The specimen is built in if the feature (23, 24; 26) is found in the specimen and is judged to be correct; otherwise the specimen is rejected.



Best Available Copy

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report: 18 August 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.